






Qian NVR KIT 8 Channels with POE IP Camera 5MP Bullet x 4pcs

BUILD A ROBUST SURVEILLANCE NETWORK

The Qian NVR supports up to 8ch IP camera inputs with Power over Ethernet (PoE) capabilities, ensuring easy installation and efficient power management. With its flexible capacity, you can connect a range of cameras to create a comprehensive surveillance network tailored to your specific requirements.



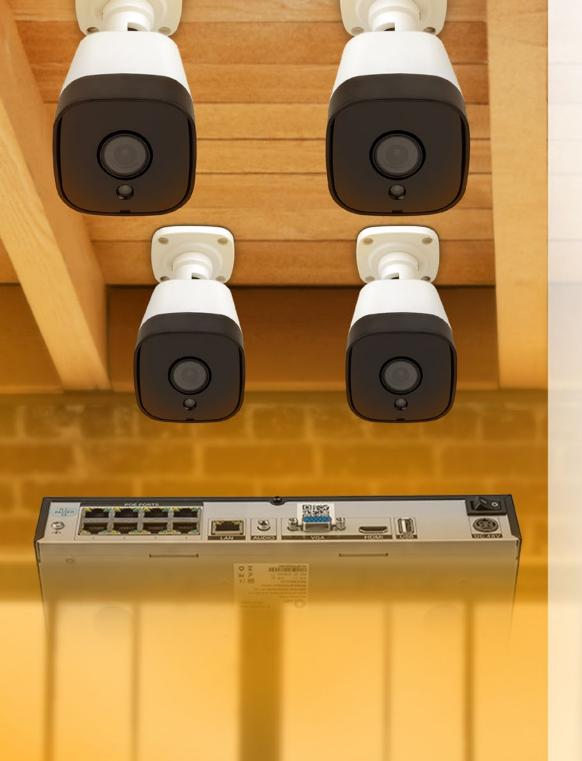

SEE EVERY DETAIL WITH UNMATCHED CLARITY

Experience stunning video quality with up to 1 channel at 8MP or 4 channels at 1080P decoding capacity. The VGA/HDMI simultaneous video output delivers crisp and clear visuals, with the HDMI port supporting a maximum resolution of 4K. Enjoy immersive monitoring experiences with exceptional detail and clarity!







FLEXIBLE DISPLAY OPTIONS

With VGA and HDMI outputs, the Qian NVR Kit offers flexibility in choosing display options. You can connect it to a variety of monitors or display devices, including computer monitors, TVs, or projectors, based on your specific requirements and available equipment.



A comprehensive surveillance solution designed to meet the security needs of homes, offices, shops, and factories. The 5MP resolution of the 4 IP Cameras included delivers sharp and detailed images. This advanced kit combines cutting-edge features with user-friendly functionality, providing reliable monitoring.

Qian







Video Input	IP Camera Input x 8 channels
Incoming Bandwidth	40 Mbps
Outgoing Bandwidth	40 Mbps
Video Output	HDMI Output: 3840×2160, 1920×1080,
	1280×1024, 1024×768
	VGA Output: 1920×1080, 1280×1024, 1024×768
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1@30fps
Streaming Capability	Support dual stream
Multi-screen Display	1/4/9
Resolution	Recording resolution: 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1, etc.

EAN	7500619011426
Video Compression Format	H.264/ H.265/ H.265+(Smart Encode)
Net weight	NVR: 1kg (2.2 lb) without HDD Camera: 0.35kg (0.77 lb)/pc
XI	(7.16 × 2.61 × 2.60 inch)
	Camera: 181.9 × 66.26 × 66.17 mm
	(10.04 × 9.26 × 1.87 inch)
Dimensions	NVR: 255 × 235.1 × 47.5 mm
Certifications	CE/FCC
	Less than 90% RH
	Camera: -25°C ~ 55°C (-13°F ~ 131°F) /
	Less than 90% RH
Working Temperature / Humidity	NVR: -10°C ~ 50°C (14°F ~ 122°F) /
	Camera: Max 5W
Power Consumption	NVR: < 5W (without HDD)
	Camera: DC12V/POE (IEEE 802.3af)
Input Power	NVR: DC48V/1.25A
Support APP	Qian Vision for smart phone/devices.
Management Software	NVR Management Software installed/ CMS
	Backup Mode: USB Device, Network
	Alarm, Picture grid
	Sync Playback, Search Mode (Time/Date),
	Rest Button, Scheduling, Event,
Support Features	Human Detection, Intrusion Detection,
Camera Resolution	Max to 2560(H)×1920(V)
Carriera type	(Qian PN: QEC-IBUL5)
Camera type	IP Camera 5MP Bullet x 4pcs
	VGA x1
	HDMI x1
	Audio Output x1 USB2.0 port x2
Interface	POE: 8 Ports (IEEE 802.3af), 48W
Interfore	Ethernet port x1
Network Interface	RJ-45 (10/100 Mbps) self-adaptive
Storage	HDD 1TB, (SATA interface x1, up to 8TB)
Interoperability	ONVIF, SDK
Max. User Access	8 users (via Windows/ Android/ iOS devices)
	802.1X, SNMP, 3G/4G, PPPoE
	SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS,
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP,
Trigger Events	Motion Detection, Video Loss, IVS